



KENNEDY VALVE

2-1/2" - 12" HIGH PRESSURE GATE VALVE

CERTIFICATIONS

ISO 9001

ISO 14001


BS OHSAS 18001



AWWA C509
AWWA C515



WWW.KENNEDYVALVE.COM

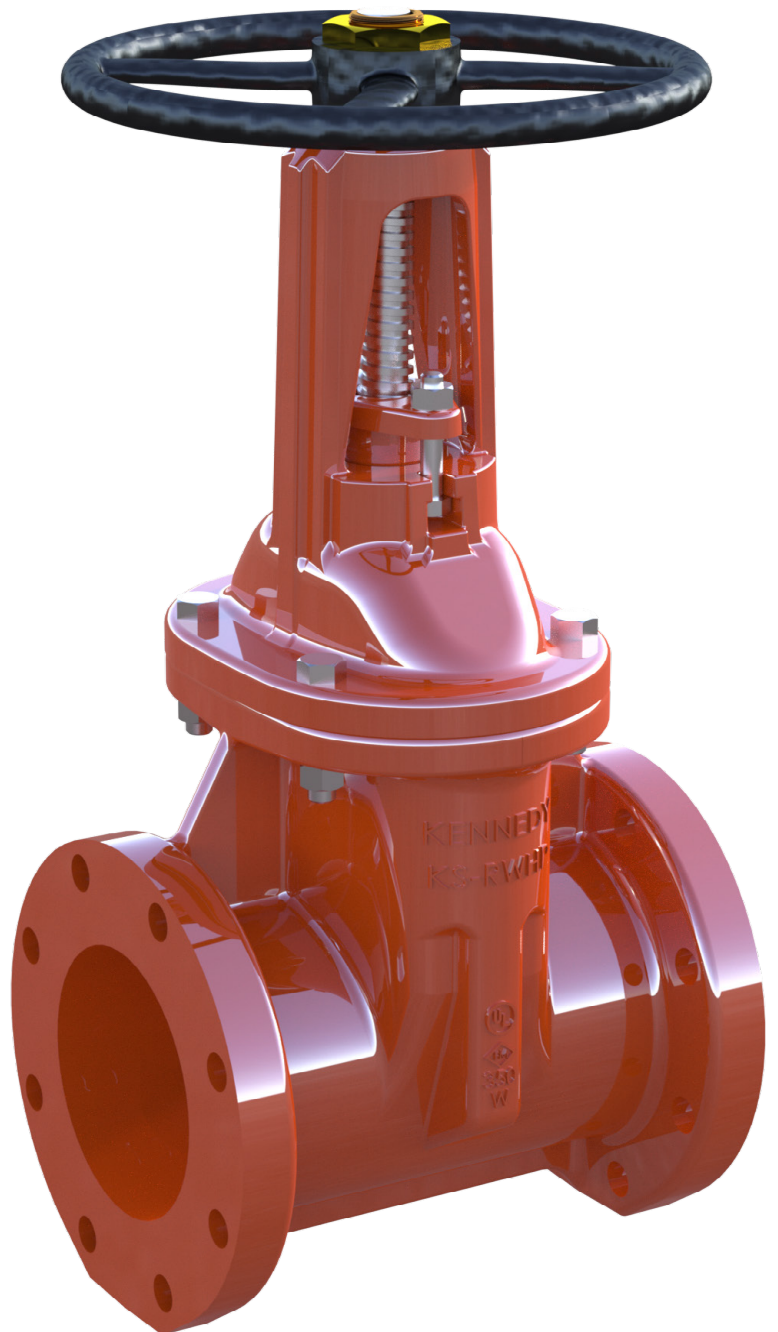

HIGH PRESSURE RESILIENT WEDGE GATE VALVE

Our AWWA C509 & C515 Resilient Wedge Gate Valves meet or exceed the requirements of AWWA standard C509 & C515, UL-262/FM-1120/1130, ULC - Underwriters of Canada, and NSF Listed.

Available in either non-rising stem (NRS) or outside screw & yoke (OS&Y). NRS Style is available with post plate for adaptation with an indicator post.

Model KS-FWHP meets AWWA C509.

Model KS-RWHP meets AWWA C515.

Working Pressure	Hydrostatic Test Pressure	Seat Test Pressure
- 350 PSI	- 700 PSI (Shell)	- 525 PSI

ACCESSORIES

- | | |
|-------------------------|-------------------|
| - Indicator Posts | - Floorstands |
| - "T" Handles | - Handwheels |
| - Stem Guides | - Extension Stems |
| - 2" Sq. Operating Nuts | - Chain Wheels |

UL/FM Approved 350 PSI End Connections

KS-RWHP 350 PSI

END CONNECTION	NRS	OS&Y
FLANGED (Class 125)	4"-12"	4"-12"
FLANGED (Class 250)	4"-12"	4"-12"
GRV	4"-8"	4"-8"
FLGXGRV	4"-8"	4"-8"
MJ	4"-12"	
FLGXMJ	4"-12"	
MJXTAP	4"-12"	
TYTON	4"-12"	
FLGXTYTON	4"-12"	
TAPPED	4"-12"	

C509 KS-HP 350 PSI (DUCTILE)

END CONNECTION	NRS	OS&Y
FLANGED (Class 125)	2.5"-3"	2.5"-3"
FLANGED (Class 250)	2.5"-3"	2.5"-3"
GRV	3"	3"
FLGXGRV	3"	3"
MJ	2.5"-3"	2.5"-3"
THREADED	2.5"-3"	2.5"-3"
PVC	2.5"-3"	2.5"-3"
FLGXMJ	2.5"-3"	2.5"-3"

* See submittal for end connection dimensions



KENNEDY VALVE

ORDERING INFORMATION

PH: 800-782-5831
607-734-2211
FAX: 800-952-4771

SALES@KENNEDYVALVE.COM
WWW.KENNEDYVALVE.COM

KENNEDY VALVE

1021 E. WATER ST.
ELMIRA, NY
14902-1516



For Generations