



KENNEDY VALVE

# 2½" - 12" HIGH PRESSURE GATE VALVE

## CERTIFICATIONS


ISO 9001

ISO 14001

ISO 45001



AWWA C509  
AWWA C515

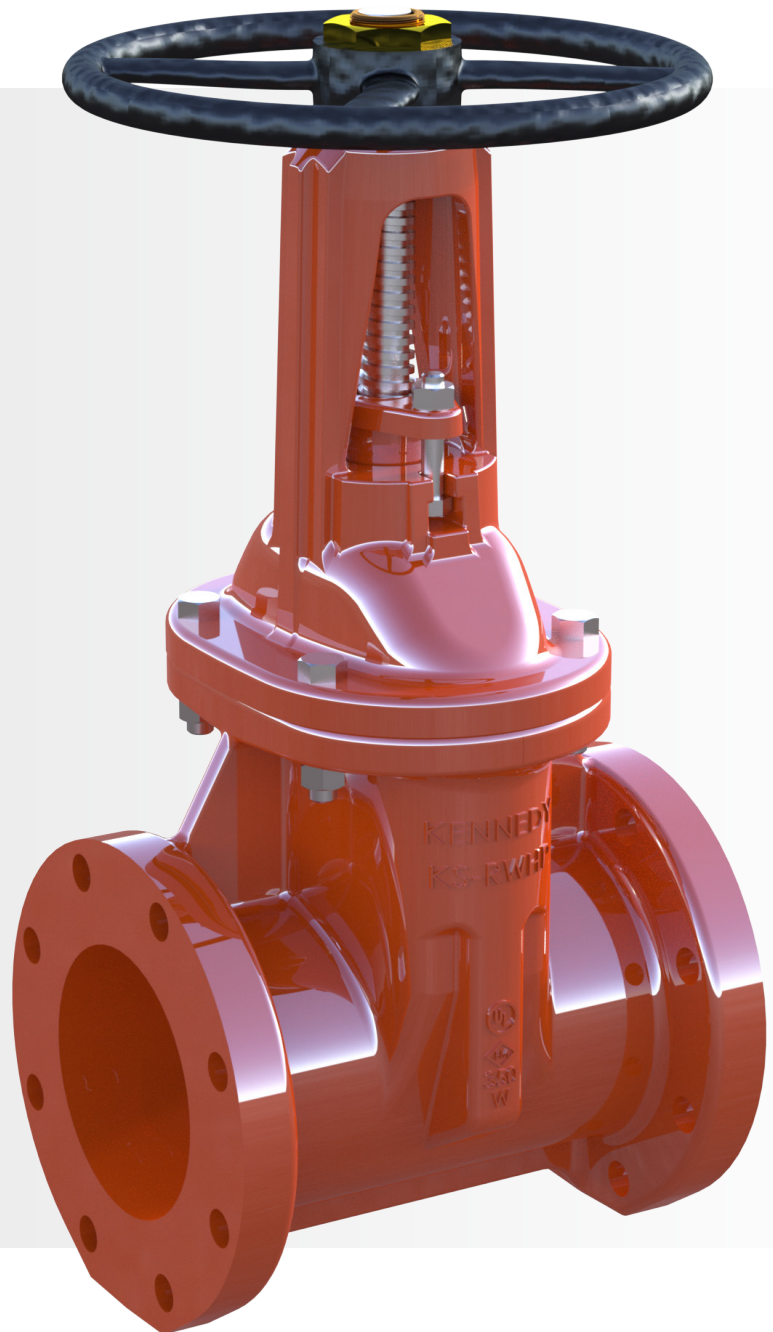

# HIGH PRESSURE RESILIENT WEDGE GATE VALVE

Our AWWA C509 & C515 Resilient Wedge Gate Valves meet or exceed the requirements of AWWA standard C509 & C515, UL-262/FM-1120/1130, ULC - Underwriters of Canada, and NSF Listed.

Available in either non-rising stem (NRS) or outside screw & yoke (OS&Y). NRS Style is available with post plate for adaptation with an indicator post.

Model KS-FWHP meets AWWA C509.

Model KS-RWHP meets AWWA C515.

<b>Working Pressure</b>	<b>Hydrostatic Test Pressure</b>	<b>Seat Test Pressure</b>
- 350 PSI	- 700 PSI (Shell)	- 525 PSI

## ACCESSORIES

- |                         |                   |
|-------------------------|-------------------|
| - Indicator Posts       | - Floorstands     |
| - "T" Handles           | - Handwheels      |
| - Stem Guides           | - Extension Stems |
| - 2" Sq. Operating Nuts | - Chain Wheels    |

## UL/FM APPROVED 350 PSI END CONNECTIONS

### KS-RWHP 350 PSI

END CONNECTION	NRS	OS&Y
FLANGED (Class 125)	4"-12"	4"-12"
FLANGED (Class 250)	4"-12"	4"-12"
GRV	4"-8"	4"-8"
FLGXGRV	4"-8"	4"-8"
MJ	4"-12"	
FLGXMJ	4"-12"	
MJXTAP	4"-12"	
TYTON	4"-12"	
FLGXTYTON	4"-12"	
TAPPED	4"-12"	

### C509 KS-HP 350 PSI (DUCTILE)

END CONNECTION	NRS	OS&Y
FLANGED (Class 125)	2.5"-3"	2.5"-3"
FLANGED (Class 250)	2.5"-3"	2.5"-3"
GRV	3"	3"
FLGXGRV	3"	3"
MJ	2.5"-3"	2.5"-3"
THREADED	2.5"-3"	2.5"-3"
PVC	2.5"-3"	2.5"-3"
FLGXMJ	2.5"-3"	2.5"-3"

\* See submittal for end connection dimensions



**KENNEDY VALVE**

## ORDERING INFORMATION

PH: 800-782-5831  
607-734-2211

KNV.SALES@MCWANE.COM  
WWW.KENNEDYVALVE.COM

## KENNEDY VALVE

1021 E. WATER ST.  
ELMIRA, NY  
14902-1516



For Generations

HP RWGV REV 2: AUG 2021